


Giada DT-H110DL/SL

Intel® Skylake Desktop CPU Solution

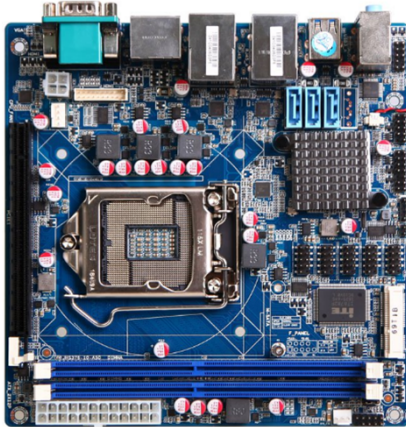

Features

- Supports Intel® Skylake Desktop CPU (TDP≤65W)
- 2 x U-DIMMs,DDR4-2133MHz,Up To 32G
- 2 x DP + HDMI/VGA
- 1 x mSATAIII, 4 x SATAIII
- 5 x COM, 6x USB2.0, 4 x USB3.0, 2 x RJ45
- 1 x PCIe 16X Slot, 2 x Mini-PCIe Slot

Core System

CPU	Supports Intel® Skylake Desktop CPU
System Memory	2 x 284-pin U-DIMMs, DDR4-2133MHz, up to 32 GB
Chipset	Intel® H110 Chipset
BIOS	AMI EFI 64 Mbit
JAHC (Patented Tech)	WatchDog Timer, Auto Power On, RTC Power Remote Control, Wake On Lan
Expansion Interface	1 x Full-length Mini-PCIe with Wi-Fi/BT Support 1 x Full-length Mini-PCIe with mSATAIII Support 1 x PCIe 16X Solt 1 x SIM

Mechanical and Environmental

Dimensions	170mm x 170mm
Power Requirement	ATX
Operating Temperature	0~40°C at 0.7m/s Air Flow
Storage Temperature	-20°C~75°C
Relative Humidity	95%@40°C (Non-condensing)

I/O

MIO	DT-H110DL:5 x COM DT-H110SL:2 x COM
SATA	1 x mSATAIII, 4 x SATAIII
Ethernet	Realtek 8111F, Gigabit Ethernet, Wake-on-LAN DT-H110DL:2 x RJ45 DT-H110SL:1 x RJ45
Audio	Realtek ALC662-VD0, High Definition Audio (HD) 1 x Mic-in, 1 x Line-out, 1 x Audio-out
USB	6 x USB2.0, 4 x USB3.0

Ordering Information

DT-H110DL	Chipset:H110, RAM:Up to 32G 1 x HDMI/VGA, 2 XDP, 6 x USB2.0, 4 x USB3.0 5 x COM, 2 x RJ45 1 x Full size Mini-PCIe, 1 x SIM Operating Temperature: 0 ~ 60°C
DT-H110SL	Chipset:H110, RAM:Up to 32G 1 x HDMI/VGA, 2 XDP, 6 x USB2.0, 4 x USB3.0 2 x COM, 1 x RJ45 1 x Full size Mini-PCIe, 1 x SIM Operating Temperature: 0 ~ 60°C

Display

Display Chipset	Integrated Intel® HD Graphics
Memory Size	Share System Memory
Display Interface	1 x HDMI1.4b (Max. 4096 x 2304 @24 fps) 1 x VGA (Max. 2560 x 1600 @60 fps) 2 x DP1.2 (Max. 4096 x 2304 @60 fps)

Dimensions and Drawing

