

Giada P216(vPro)

The OPS standard PC for Interactive Whiteboard and Digital Signage with vPro Technology



Features

- ◆ Supports Intel® Core i5-7300U Processors
- ◆ 2 x SO-DIMM DDR3L, Up to 32GB
- ◆ 1 x JAE (TX25 80-pin), 1 x VGA
- ◆ 1 x 2.5" SATA
- ◆ 3 x USB3.0, 1 x USB2.0, 1 x RJ45, 1 x RS232
- ◆ Support vPro

Specifications








RoHS CE FC CCC

P216-B6000 (vPro)

| | | P216-B6000 (vPro) |
|------------------|----------------------|---------------------------------------------------|
| Processor | CPU | Intel® Core i5-7300U |
| | Frequency | 2.60 GHz (Up to 3.50 GHz) |
| | BIOS | AMI Source Code |
| | Chipset | SOC |
| Memory | Type | DDR3L-1600MHz |
| | Socket | 2 x SO-DIMM |
| | Max Size | 32GB |
| Graphics | GPU | Intel® HD Graphics 620 |
| | Graphic Engine | DirectX12, OpenGL4.4, OpenCL 2.1 |
| | DP (80Pin JAE OPS) | 1 x DP (Max. 4096 x 2304 @60Hz) |
| | HDMI (80Pin JAE OPS) | 1 x HDMI (Max. 4096 x 2304 @24Hz) |
| | VGA | 1 x VGA (Max. 2560 x 1600@60Hz) |
| Network | Controller | Intel I219LM Gigabit Ethernet |
| | Interface | 1 x RJ45 |
| I/O | USB | 3 x USB 3.0, 1 x USB 2.0 |
| | JAE | 1 x JAE (TX25 80-pin) |
| | Display Interface | 1 x VGA |
| | LAN | 1 x RJ45 |
| | Serial Port | 1 x RS232 |
| | Audio | 1 x MIC-IN, 1 x AUDIO-OUT |
| | Mini-PCle1# | 1 x Full-size Mini-PCle for mSATA |
| | Mini-PCle2# | 1 x Full-size Mini-PCle for WiFi/BT/3G |
| | SIM | 1 x SIM Slot |
| JAHc Switch | 1 | |
| Storage | SATA | 1 x 2.5" SATA |
| JAHc Tech | WatchDog Timer | 0~255 Second Time Out Support |
| | Auto Power On | Power Activated Automatically Start |
| | RTC | Set Up Independently Every day, A Week as a Cycle |
| | Remote Control | N/A |
| | Wake On Lan | Supported |
| Operation System | Windows | Windows 10 |
| | Linux | Supported |

P216-B6000 (vPro)

| | | |
|---------------|------------------------|-----------------------------------------------------|
| Power | Power Type | DC-IN |
| | Input Voltage | 12V~19V |
| Mechanical | Dimensions (W x D x H) | 200mm x 119mm x 30mm |
| | Fanless | N/A |
| | Construction | Metal |
| | Mounting | Desk/Wall Mounting and VESA Mounting Kit (Optional) |
| | Color | Black |
| Environment | Operating Temperature | 0°C ~ 40°C (32 °F ~ 104 °F) at 0.7m/s Air Flow |
| | Relative Humidity | 95% @ 40°C (non-condensing) |
| Certification | Certification | CE, FCC Class B, CCC |

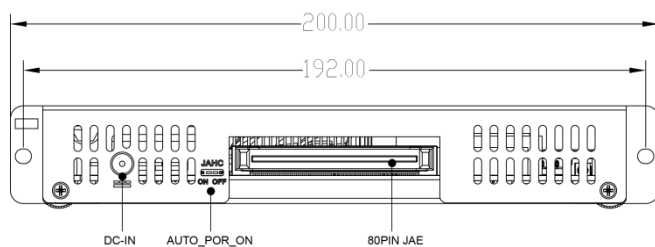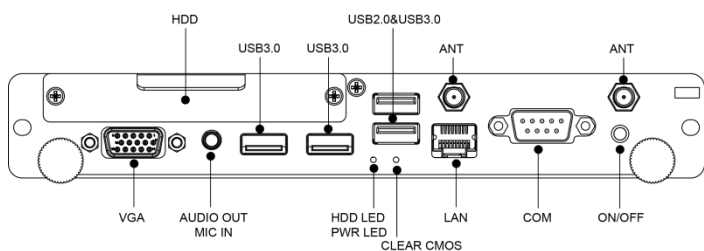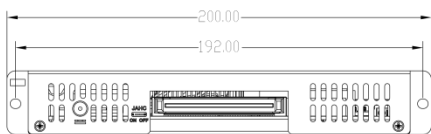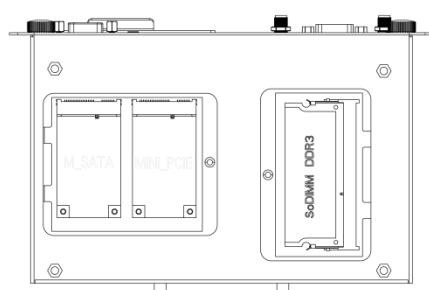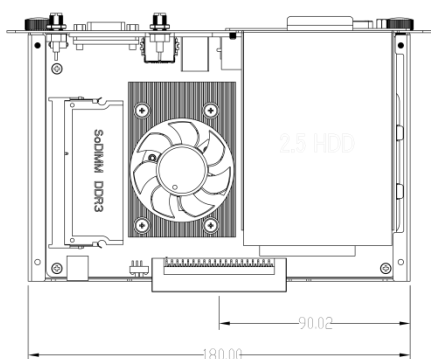

Order Information

| Part Number | Intel CPU | RAM | JAE | VGA | GbE | USB | Audio | RS232 | Operating Temperature |
|------------------|-----------|------------|-----|-----|-----|--------------------------|-----------------------------|-------|-----------------------|
| P216-B6000(vPro) | i5-7300U | Up to 32GB | 1 | 1 | 1 | 3 x USB3.0 1 x USB2.0 | 1 x MIC-IN 1 x AUDIO OUT | 1 | 0-40°C |

Packing List

| Part Number | Description | Part Number | Description |
|-------------|-----------------|-------------|------------------|
| - | 1 x P216 | - | 1 x Drive Disk |
| - | 1 x User Manual | - | 1 x WiFi Antenna |